


*ADA: AMERICAN WITH DISABILITY ACT.

NOTES:

1. ALL STRUCTURAL ITEMS TO CONFORM TO 2009 IBC REQUIREMENTS.
2. PRIOR TO CONSTRUCTION ALL STRUCTURAL CROSS SECTIONS SHALL BE REVIEWED BY A QUALIFIED STRUCTURAL AND/OR GEOTECHNICAL ENGINEER, AND MODIFIED AS NECESSARY BASED ON THE SITE SPECIFIC GEOTECHNICAL REPORT.

(N.T.S.)

BRICK SIDEWALK		DATE
APPROVED	DATE	CSSW-3
DEPARTMENT OF TRANSPORTATION & ENVIRONMENTAL SERVICES		PAGE X
ALEXANDRIA VIRGINIA		

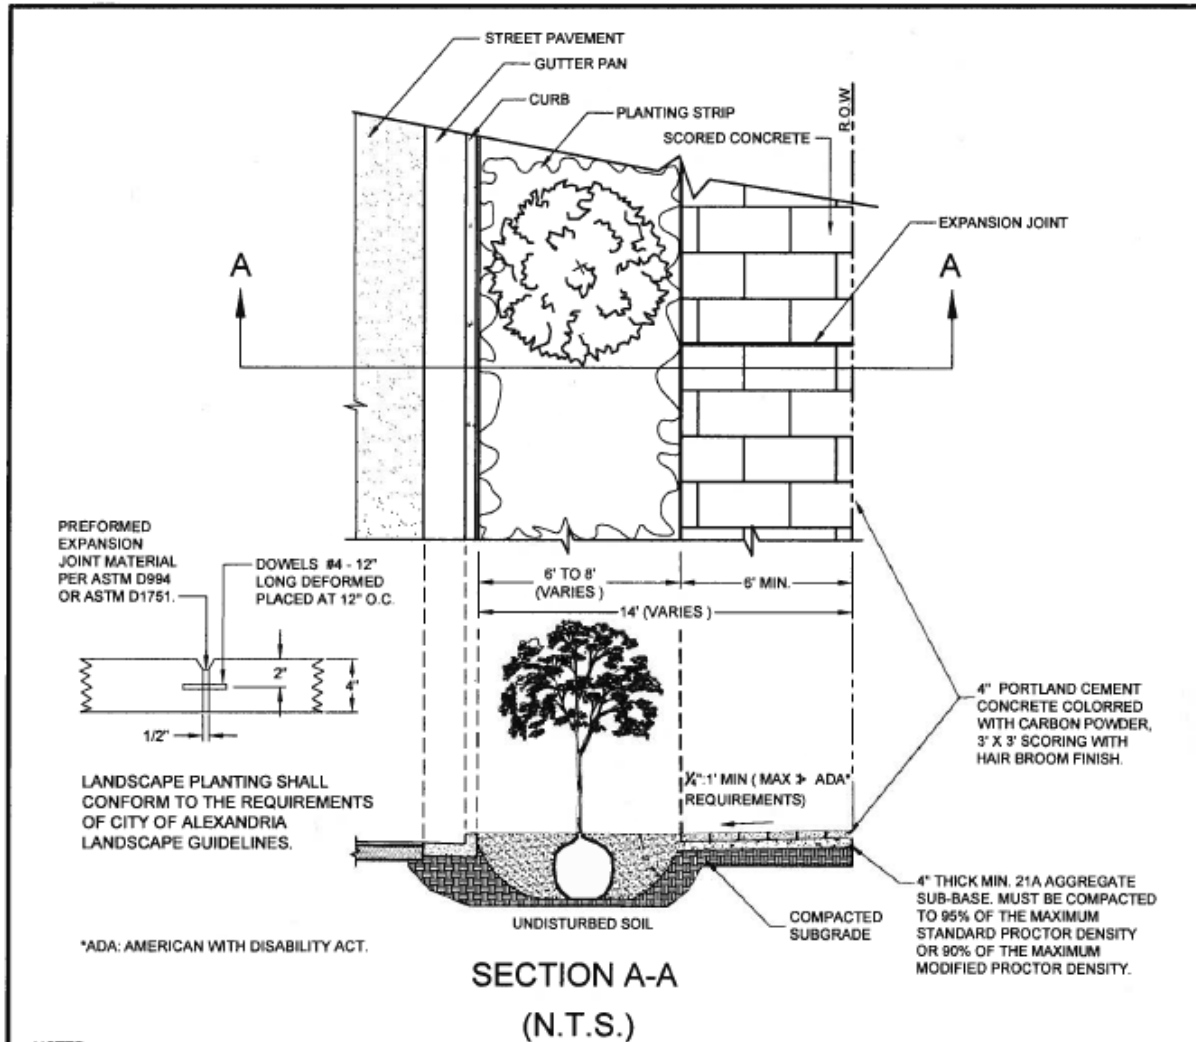

NOTES:

1. CONTRACTION JOINTS SHALL BE SAW CUT NOT MORE THAN 3/16" IN WIDTH AND SHALL BE CUT TO A DEPTH OF MINIMUM 1/3 THE THICKNESS OF THE CONCRETE SLAB.
2. THE EXPANSION JOINTS SHALL BE 1/2" WIDE AND SHALL BE THE FULL THICKNESS OF THE CONCRETE SLAB, AND SHALL BE OF PRE-FORMED EXPANSION JOINT MATERIAL CONFORMING TO THE REQUIREMENTS OF ASTM D994 ASPHALT OR ASTM D1751 FIBRE. EXPANSION MATERIAL SHALL BE SECURED IN A MANNER THAT WILL PREVENT MOVEMENT OR DISPLACEMENT OF CONCRETE DURING PLACEMENT.
3. THE EXPANSION JOINTS SHALL BE PLACED PERPENDICULAR TO CONCRETE CURB AT A DISTANCE OF 30' OR COINCIDING WITH THE SCORING.
4. SAWING OF JOINTS SHALL BE CONDUCTED AS SOON AS THE CONDITION OF THE CONCRETE PERMITS AND BEFORE ANY RANDOM CRACKING APPEARS.

CONCRETE SIDEWALK SCORING			
			DATE
		DEPARTMENT OF TRANSPORTATION & ENVIRONMENTAL SERVICES	CSSW- 4
APPROVED	DATE	ALEXANDRIA VIRGINIA	PAGE X

