

WEATHER SHIELD.

WINDOWS & DOORS

P.O. Box 309 Medford, WI 54451
weathershield.com

QUOTE

Printed: 11/19/2019 08:05 AM

Project Date: 11/18/2019

Quote #: 2262790


Quote Date: 10/08/2019

WSOneSource 1.0

Delivery Instructions:

Deliver To:

LINE #	QUANTITY	ATTRIBUTES	UNIT	EXTENDED
1	1	P.O.: Lapp Emily Location: Custom 26 x 48-1/8 Job: Emily Lapp	Price:	839.68 839.68



Weather Shield Casement Rectangle 6204 1 Wide
Complete Unit

----- Mfg Date 11/1/2005 to Present

----- Frame Style Casement/Awning

See weathershield.com for PG/DP information

Sizing Method Jb to Jb/Frame Size

----- R/O Size 27" X 49 3/8"

----- Jamb Size 26" X 48 1/8"

----- Glass Size 22" X 44"

Operating Code - Left

Poly - Colonial Sash Profile - White

----- Exterior Panel/Sash Color White

W/Aluminum Sill Cladding

----- No Exterior Casing -

----- No Subsill -

----- 5 1/2" Installation Clips - Shipped Loose

4 9/16" Jamb Depth -

Pine - Prefinished White

Insulated Low E

----- W/Out Neat Clean Glass

Glazing Bead Type - Colonial

----- W/Out Protective Film

----- Black Spacer

----- W/Inert Airspace Gas

1 Lite -

W/Standard Hardware - White - Double Locks -

----- 10" Adjustable Hinge -

----- Split Arm Operator

----- No Reinforced Keeper

----- Handle/Cover/Kit Ship Separate

W/Screen - White - NO-SEE-UM Mesh - Shipped Loose

Standard Unit

No Field Prepping

→ LOW E 272

(Viewed from Exterior)

Rough Opening 27" x 49-3/8"

Overall Jamb 26" x 48-1/8"

Ratings:
CPD Product Number: WEA-N-242-00252-00001
U-Factor: 0.28
Solar Heat Gain Coefficient (SHGC): 0.29
Visible Transmittance (VT): 0.51
Energy Star: Central

WEATHER SHIELD.

WINDOWS & DOORS

P.O. Box 309 Medford, WI 54451
weathershield.com

QUOTE

Printed: 11/19/2019 08:05 AM


Project Date: 11/18/2019

Quote #: 2262790

Quote Date: 10/08/2019

WSOneSource 1.0

LINE #	QUANTITY	ATTRIBUTES	UNIT	EXTENDED
2	1	P.O.: Lapp Emily Location: Custom 26 x 48-1/8 Job: Emily Lapp		
		Price:	839.68	839.68



Weather Shield Casement Rectangle 6204 1 Wide
Complete Unit

----- Mfg Date 11/1/2005 to Present

----- Frame Style Casement/Awning

See weathershield.com for PG/DP information

Sizing Method Jb to Jb/Frame Size

----- R/O Size 27" X 49 3/8"

----- Jamb Size 26" X 48 1/8"

----- Glass Size 22" X 44"

Operating Code - Right

Poly - Colonial Sash Profile - White

----- Exterior Panel/Sash Color White

W/Aluminum Sill Cladding

----- No Exterior Casing -

----- No Subsill -

----- 5 1/2" Installation Clips - Shipped Loose

4 9/16" Jamb Depth -

Pine - Prefinished White

Insulated Low E

----- W/Out Neat Clean Glass

Glazing Bead Type - Colonial

----- W/Out Protective Film

----- Black Spacer

----- W/Inert Airspace Gas

1 Lite -

W/Standard Hardware - White - Double Locks -

----- 10" Adjustable Hinge -

----- Split Arm Operator

----- No Reinforced Keeper

----- Handle/Cover/Kit Ship Separate

W/Screen - White - NO-SEE-UM Mesh - Shipped Loose

Standard Unit

No Field Prepping

→ Low E 272

(Viewed from Exterior)

Rough Opening 27" x 49-3/8"

Overall Jamb 26" x 48-1/8"

Ratings:
CPD Product Number: WEA-N-242-00252-
00001
U-Factor: 0.28
Solar Heat Gain Coefficient (SHGC): 0.29
Visible Transmittance (VT): 0.51
Energy Star: Central

WEATHER SHIELD.

WINDOWS & DOORS

P.O. Box 309 Medford, WI 54451
weathershield.com

QUOTE

Printed: 11/19/2019 08:05 AM

Project Date: 11/18/2019

Quote #: 2262790


Quote Date: 10/08/2019

WSOneSource 1.0

LINE #	QUANTITY	ATTRIBUTES	UNIT	EXTENDED
3	2	P.O.: Lapp Emily Location: Left Hinge Job: Emily Lapp		
		Price:	26.55	53.10

Weather Shield Casement Rectangle 6204
11/01/2005 to Present
Window Hardware
944789 - Hinge Arm & Track-Single
Stainless Steel, Egress, 10"
Left

Left Hinge

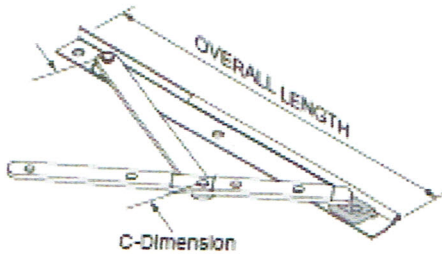


(Viewed from Exterior)
Rough Opening
Overall Jamb

LINE #	QUANTITY	ATTRIBUTES	UNIT	EXTENDED
4	2	P.O.: Lapp Emily Location: Right Hinge Job: Emily Lapp		
		Price:	26.55	53.10

Weather Shield Casement Rectangle 6204
11/01/2005 to Present
Window Hardware
944790 - Hinge Arm & Track-Single
Stainless Steel, Egress, 10"
Right

Right Hinge

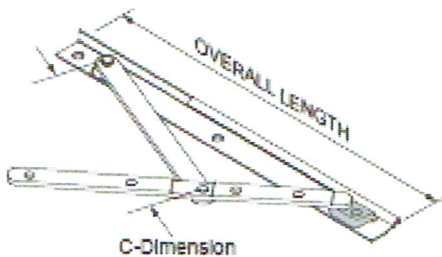

(Viewed from Exterior)
Rough Opening
Overall Jamb

WEATHER SHIELD.

WINDOWS & DOORS

P.O. Box 309 Medford, WI 54451
weathershield.com

QUOTE

Printed: 11/19/2019 08:05 AM

Project Date: 11/18/2019

Quote #: 2262790

Quote Date: 10/08/2019

WSOneSource 1.0

Miscellaneous Charges:


Price:	1,785.57
Misc. Taxable Charges:	0.00
State Taxes:	107.13
City Taxes:	0.00
Local Taxes:	0.00
Taxes (Other):	0.00
Misc. Non-Taxable Charges:	0.00
<u>Total Price</u>	<u>1,892.70</u>

Thank you for choosing Weather Shield Windows & Doors

Note: Customer Agrees to pay the CC processing fees for running the deposit through CC machine. This will be in addition to the 50% total that is due.


INSULATED GLASS BY WEATHER SHIELD

Weather Shield's insulated glass (IG) utilizes Cardinal® glass insulated with Weather Shield's Real Warm-Edge® spacer which takes window efficiency to unparalleled heights. With no metal to transfer temperatures, glass is thermally effective – reducing condensation and frost build-up. Feel and see the difference. This state-of-the-art system is standard on all Weather Shield insulated glass.




Dual Insulated

Insulated
Insulated Low-E (LoE²-272)
Zo-e-shield 5 (LoE³-366)
Zo-e-shield 5 Extreme (LoE³-366 w/i89)
Insulated Low-E 240
Insulated Low-E 340
Insulated Low-E 189
Insulated Low-E 180 w/ i89



Laminated Dual Insulated

Insul ¼" Laminated (.030" PVB)
Insul ¼" Low-E Laminated (LoE²-272 & .030" PVB)
Zo-e-shield 6 (LoE³-366 w/ .030" PVB)
Zo-e-shield 6 Certified (LoE³-366 w/ .060" PVB)




Triple Insulated

Zo-e-shield 7 [LoE³-366(#2) & LoE²-272(#5)]


INSULATED GLASS BY CARDINAL IG

In addition to the Weather Shield IG options, we also offer Cardinal IG – the same Cardinal glass options but produced with Cardinal's Endur spacer system. Cardinal IG produced with Endur® spacer (available in Endur Black and Standard Mill Finish) allows slightly more thermal transfer than Weather Shield IG produced with Real Warm Edge Spacer, potentially resulting in higher U-values that may not meet ENERGY STAR® where Weather Shield IG would. Please visit weathershield.com for a complete listing of thermal performance values to compare data.




Dual Insulated

Cardinal Insulated
Cardinal LoE²-272
Cardinal LoE³-366
Cardinal LoE³-366 w/ i89
Cardinal LoE²-240
Cardinal LoE³-340
Cardinal LoE-180
Cardinal LoE-180 w/ i89



Laminated Dual Insulated

Cardinal Insul Laminated (.030" PVB)
Cardinal LoE²-272 Laminated (.030" PVB)
Cardinal LoE³-366 Laminated (.030" PVB)
Cardinal LoE²-272 w/ i89 Laminated (.030" PVB)
Cardinal LoE³-366 w/ i89 Laminated (.030" PVB)
Cardinal LoE²-272 Laminated (.060" PVB)
Cardinal LoE³-366 Laminated (.060" PVB)



Triple Insulated

Cardinal LoE³-366(#2) & LoE²-272(#5)


WEATHER SHIELD GLASS OFFERINGS

WEATHER SHIELD® WINDOWS & DOORS


A Difference You Can Feel

Weather Shield's **Real Warm-Edge® spacer** takes window efficiency to unparalleled heights. With no metal to transfer temperatures, glass is thermally effective — reducing condensation and frost build-up. This state-of-the-art system is standard on all Weather Shield insulated glass.

Available in black*, dark gray, and light gray to create a look to suit any design.



METAL SPACER




REAL WARM EDGE

*Only available for Weather Shield Contemporary Collection and Premium Series products.



Let Your Windows Work For You

Take advantage of **EasyCare Glass** — glazed with an invisible, permanent coating that resists dirt and causes water to “sheet off” rather than cling to the glass surface. As a result, water spreads and evaporates quickly to reduce spotting and make cleaning easy and quick.



Making the Right Choice

Weather Shield offers an expansive selection of glass choices assuring a suitable option for all climates. Regardless of your location, choosing a window that is energy efficient while providing the ultimate level of comfort regardless of the season is extremely important.

WEATHER SHIELD GLASS	CARDINAL IG	BENEFITS
Insulated Low-e	LoE ² -272	Great for all climates providing year-round comfort by minimizing the sun's heat and damaging UV rays in the summer while also reflecting the sun's heat back into the room during the winter months.
Zo-e-shield 5	LoE ³ -366	Considered to be the ultimate performance glass delivering an ideal balance of resistance to the sun's glaring heat, excellent insulating value and exceptional protection against the sun's damaging UV rays — all while maintaining great clarity allowing for a spectacular view.
Zo-e-shield 5 Extreme	LoE ³ -366 w/i89	A combination of two low-e coatings — bringing with it all the performance benefits of LoE ³ -366 and significantly improved energy efficiency. The LoE-i89 coating is applied to the interior room surface of your window's insulated glass and provides a means other than triple insulated glass to comply with even the most stringent northern Energy Star guidelines.
Insulated Low-e 240	LoE ² -240	A coating known best for its ability to control glare and block the sun's heat in the summer, yet still being able to keep rooms warm in the winter. Most commonly used in southern climate regions and complies with the Sea Turtle Protection Code.
Insulated Low-e 340	LoE ³ -340	Provides the best resistance available to the sun's blazing heat while minimizing glare and visible light transmittance making it a popular option for areas needing to comply with the Sea Turtle Protection Code
N/A	LoE-180	A single layer coating often referred to as a passive solar glazing. LoE-180 blocks heat loss to the outside, but keeps homes warmer by letting the sun's heat radiate in through the glass — also achieves the highest ER values making it a popular choice for homes located in northern U.S. and Canada, or in high-altitude applications where capillary tubes are required.
N/A	LoE-180 w/ i89	Combines a high solar heat gain low-e coating with an interior surface low-e coating. This combination is designed with the extreme northern climates in mind; providing great insulating performance by blocking heat loss to the exterior while reflecting that same heat back into the room. Great for northern U.S. and Canada as this glazing option reduces heating costs beyond LoE-180 used as a stand-alone passive solar option.

Laminated Glass – Laminated glass is a multifunctional glazing that offers many benefits:

- Safety Glazing – Alternative option for tempered glass; complies with building codes where safety glass is required.
- Security – Laminated glass, utilizing a .060" PVB interlayer, resists unwanted entry providing peace of mind (burglary resistant).
- Light & Solar Control – Laminated glass reduces glare and UV damage caused by the sun.
- Sound Control – Proven acoustical solution; minimizes unwanted noise from busy highways, airports, etc.